






Rubber Autoclavable Bubble Antimicrobial Floor Mat 448

Product Images

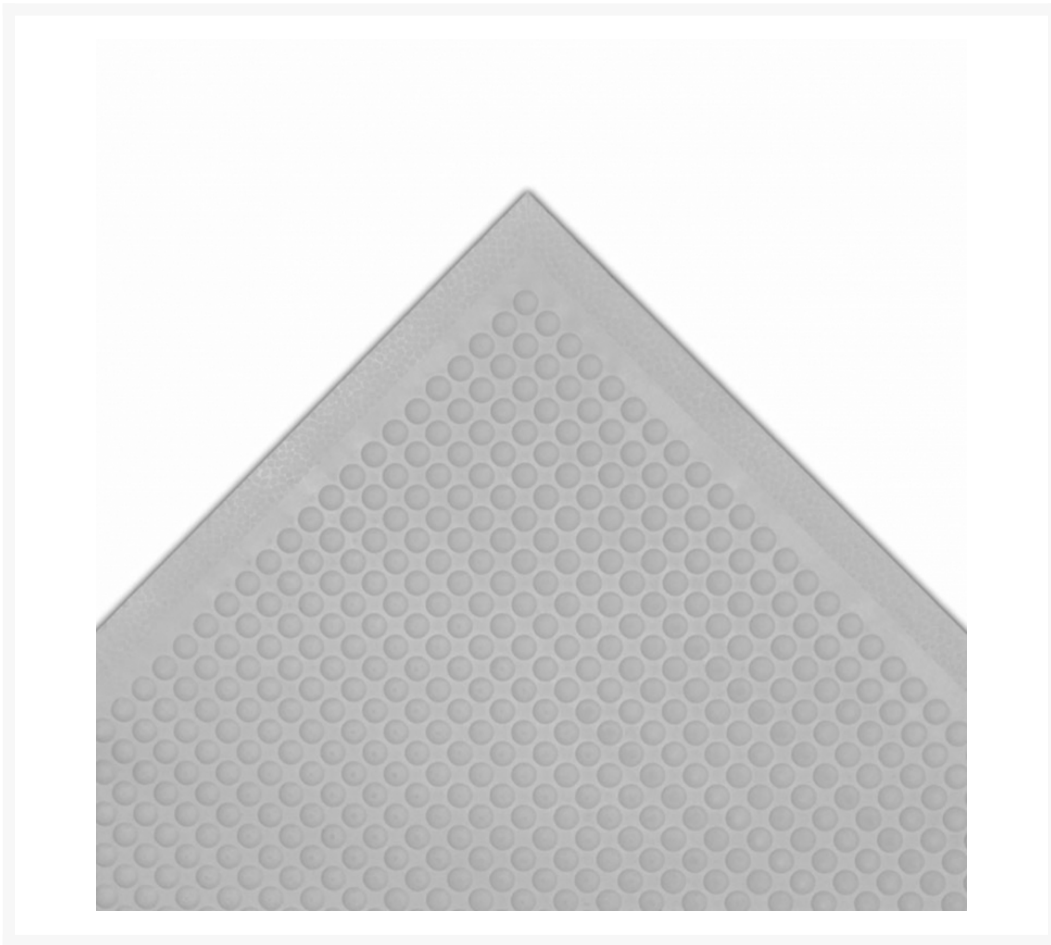

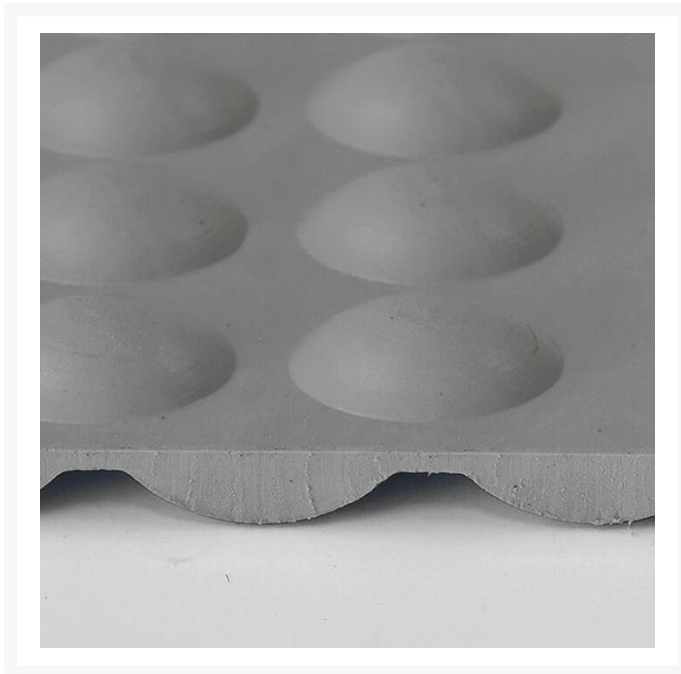

Short Description

- Anti-microbial formula resists most Gram-positive and Gram-negative bacteria
- Active ingredient is a broad spectrum anti-microbial agent mostly anti-bacterial with limited anti-fungal and anti-viral properties
- Withstands the harsh conditions of the sterilization process through use of chemicals or an autoclave
- Durable rubber top surface easy to wipe clean using most hospital grade cleaners and autoclaves
- Bubbles are molded on an offset on the top and bottom of the mat to maximize flex and create air flow, all to enhance the ergonomic benefit
- Prevents contamination in sanitized commercial and industrial sites
- Rubber molded, anti-fatigue mat. Beveled edges on all 4 sides

Description

Autoclavable Bubble Mat is a rubber anti-fatigue floor mat with a bubble top design. Offset bubbles on both the top and bottom of the mat provides flex and creates airflow resulting in maximum comfort for workers required to be on their feet for long periods of time. An industrial grade antimicrobial agent that inhibits the growth of most Gram-positive and Gram-negative bacteria and fungus is manufactured directly into the rubber compound. This ensures that the antimicrobial properties won't wear-off over time like many post applied topical agents. Although intended for use in dry environments, the top surface design is easy to wipe clean and the durable rubber compound is highly resistant to many hospital grade cleaners and disinfectants so occasional spills can be cleaned up quickly and easily. Molded beveled edges on all four sides eliminates trip hazards by allowing for easy access onto and off the mat.

Specifications

Model No	448S0023GY
Color	Gray
Dimensions	2ft x 3ft
Thickness	3/8in
UPC	662641898394
Brand	NoTrax
Overall Thickness	3/8
Standard sizes	2'x3'
Group	Ergonomic, Anti-fatigue & Safety Matting
Environment	Dry Areas
Special Characteristics	Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
Recommended Use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Special Remarks	Lightweight, easy to move to clean the floor underneath
Edges	Molded beveled edges on all sides
Usage Intensity	Medium duty
Surface Detail	Industrial Bubble Pattern
Process	Compression Molding
Pallet Quantity	60
Weight Lbs/sqft	1.2
Thickness Inch	3/8in
Fire Rating US	Pass
Anti-Fatigue Rating	Better
Slip Resistance Rating	Better
Wear Resistance Rating	Better

Prop 65

 **WARNING:** This product can expose you to chemicals including diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov.